



MG-NB-075-10T

MG-NB-075-10T

RATING

Power rating, kW / HP	55 / 75
Maximum Polished Rod Speed (RPM)	500
Thrust Bearing rating, ISO (kN / lbs)	720 / 161,970
Thrust Bearing rating, Ca90 (kg / lbs)	19,080 / 41,977
Maximum input torque (Nm / ft-lbs)	2,307 / 1,700
Gear Ratio	4 : 1

STRUCTURAL

Polished rod size in.	1 1/4" or 1 1/2"
Wellhead connection	3 1/8" 3,000 psi R-31 Flange
Wellhead connection	4 1/16" 3,000 psi R-37 Flange
Overall Height (mm / inches)	953 / 38
Drivehead Weight - no motor (kg / lbs)	209 / 460

BRAKING SYSTEM

Orifice in Hydraulic - Hose/skid

OPTIONAL EQUIPMENT

Environmental Seal Integral (5 seals)

Environmental Seal Booth (open)

Rope Packing Seal


Leak Detection System

Tachometer

MAINTENANCE

Gear Oil - 75W90 (5.5 liters)

Frequency 6 - 12 months

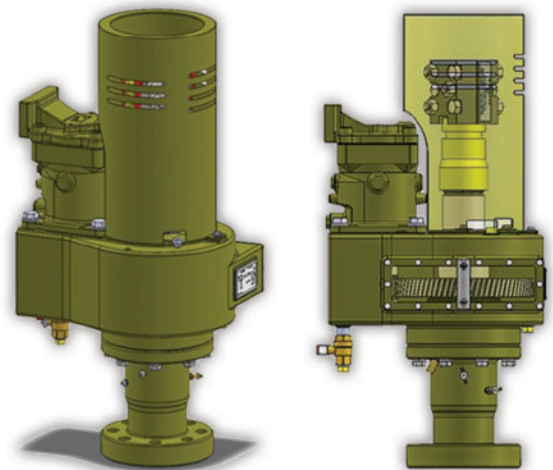

'CAUSE WE GIVE A S#%T